

Linear Bushing

LM



External cylinder

Ball

Retainer

Points

● Simple replacement for rolling guide

Since the structure adopts the raceway to be run along the shaft, the rolling guide of conventional bushing type can be easily modified to rolling guide without major design changes.

● Wide range of variations for your needs

For each dimensional series, standard, adjustable clearance, and open types are available with and without seals. You can select an optimal Linear Bushing for the specifications of your machine and device.


● Stainless steel superior in corrosion resistance are listed on lineup.

Products made of stainless steel are highly resistant to corrosion, so that they are suitable for applications where rust prevention oil is not preferred, such as in a cleanroom environment.

Identification Number and Specification

Example of an identification number

The specification of LM series is indicated by the identification number. Indicate the identification number, consisting of a model code, dimensions, a material code, a part code, a shape code, and a classification symbol for each specification to apply.

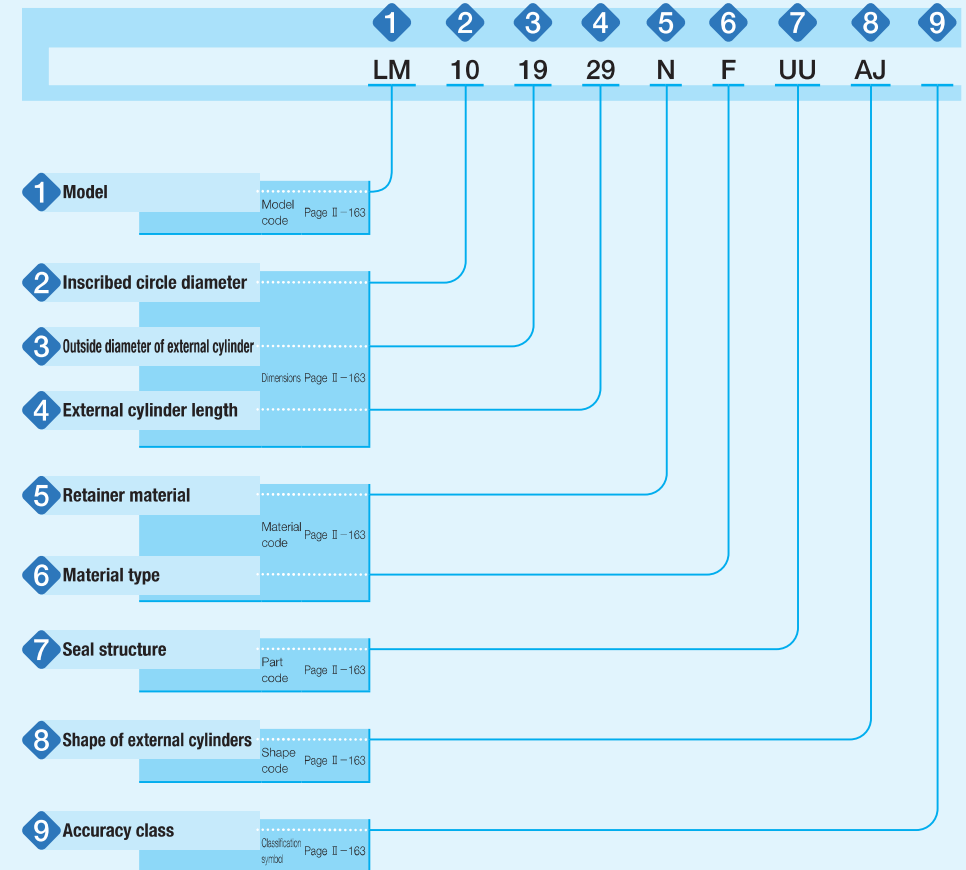

Identification Number and Specification —Model · Inscribed Circle Diameter · Outside Diameter of External Cylinder ·

1 Model	Linear Bushing (LM Series)	Metric series : LM : LME (European specification (1)) Inch series : LMB	For applicable models and sizes, see Table 1.
2 Inscribed circle diameter		For the metric series, indicate the inscribed circle diameter in mm. For the inch series, indicate the inscribed circle diameter in the unit of 1/16 inch.	
3 Outside diameter of external cylinder		For the metric series, indicate the outside diameter of external cylinder in mm. For the inch series, indicate the outside diameter of external cylinder in the unit of 1/16 inch.	
4 External cylinder length		For the metric series, indicate the length of the external cylinder in mm. For the inch series, indicate the length of external cylinder in the unit of 1/16 inch.	
5 Retainer material	High carbon steel made : No symbol Synthetic resin made : N	Specify the retainer material. For applicable models and sizes, see the "Identification number" column in the dimension table on pages II-167 to II-188.	
6 Material type	High carbon steel made : No symbol Stainless steel made : F (2)	Specify the component part material. For applicable models and sizes, see the "Identification number" column in the dimension table on pages II-167 to II-188.	
7 Seal structure	Without seal : No symbol With one end seal : U With two end seals : UU	The models with one end seal and two end seals incorporate seals with superior dust protection performance for preventing intrusion of foreign substances. For the inch series, only the type without seal (no symbol) can be specified. The maximum allowable temperature for seals is 120°C.	
8 Shape of external cylinders	Standard type : No symbol Adjustable clearance type : AJ Open type : OP	For applicable models and sizes, see Table 1.	
9 Accuracy class	High Precision : No symbol : P	High class (no symbol) and precision class (P) are available for the accuracy class of LM and LMB standard type series. For the adjustable clearance type and the open type, only high class (no symbol) is available, and the accuracy values are applicable only before cutting the external cylinders. For details of accuracy, see the dimension table on pages II-167 to II-188.	

Note (1) It is specification with the dimensions and tolerances generally used in Europe.

(2) The cage will be always stainless steel even when high carbon steel (no symbol) is specified.

External Cylinder Length · Retainer Material · Material Type · Seal Structure · Shape of External Cylinder · Accuracy Class—

Table 1 Models and sizes of LM series

External cylinder shape	Dimensional series	Material type	Seal structure	Model	Size (Shaft diameter)
Standard type 	Metric series	High carbon steel made	Without seal	LM LME	6 ~150 mm 5 ~ 80 mm
			With one end seal	LM ... U LME ... U	6 ~150 mm 5 ~ 80 mm
			With two end seals	LM ... UU LME ... UU	6 ~150 mm 5 ~ 80 mm
		Stainless steel made	Without seal	LM ... F LME ... F	6 ~ 60 mm 5 ~ 60 mm
			With one end seal	LM ... F U LME ... F U	6 ~ 60 mm 5 ~ 60 mm
			With two end seals	LM ... F UU LME ... F UU	6 ~ 60 mm 5 ~ 60 mm
Adjustable clearance type 	Metric series	High carbon steel made	Without seal	LMB	6.350~101.6 mm (1/4~ 4in)
			With one end seal	LM ... U LME ... U	6 ~150 mm 5 ~ 80 mm
			With two end seals	LM ... UU LME ... UU	6 ~150 mm 5 ~ 80 mm
		Stainless steel made	Without seal	LM ... F LME ... F	6 ~ 60 mm 5 ~ 60 mm
			With one end seal	LM ... F U LME ... F U	6 ~ 60 mm 5 ~ 60 mm
			With two end seals	LM ... F UU LME ... F UU	6 ~ 60 mm 5 ~ 60 mm
Open type 	Metric series	High carbon steel made	Without seal	LM ... OP LME ... OP	10 ~150 mm 12 ~ 80 mm
			With one end seal	LM ... U OP LME ... U OP	10 ~150 mm 12 ~ 80 mm
			With two end seals	LM ... UU OP LME ... UU OP	10 ~150 mm 12 ~ 80 mm
		Stainless steel made	Without seal	LM ... F OP LME ... F OP	10 ~ 60 mm 12 ~ 60 mm
			With one end seal	LM ... F U OP LME ... F U OP	10 ~ 60 mm 12 ~ 60 mm
			With two end seals	LM ... F UU OP LME ... F UU OP	10 ~ 60 mm 12 ~ 60 mm
	Inch series	High carbon steel made	Without seal	LMB ... OP	12.700~101.6 mm (1/2~ 4in)

Standard type : Product with high accuracy used generally over a wide range

Adjustable clearance type : This type has a cut-away slit in an axial direction of external cylinder, which is capable of clearance adjustment. If installed in a housing whose inscribed circle diameter is adjustable, it enables radial clearance to be freely adjusted without optional fitting and also enables preloading to operate.

Open type : This type is in sectoral form with the external cylinder cut away in slit by one-row raceway or two-row raceways of ball in an axial direction. In order to avoid the occurrence of long shaft deflection, it is possible to accordingly add the shaft support block tailored to (E) dimension of the sectoral form shown in the dimension table, in a midway point. And, it is also capable of clearance adjustment.

Relationship between Load Rating and Ball Raceway

The load rating of LM series varies according to the loading direction and position of ball raceway. The dimension table describes two types of values shown in Fig. 1.1 and Fig. 1.2 according to the loading direction and position of ball raceway.

Fig. 1.1 shows the case where the loading direction and ball raceway position coincides with each other, representing the loading direction A in the dimension table. Generally, this is applied when the ball raceway position cannot be specified to indeterminate direction load or loading direction.

Fig. 1.2 shows the case where the loading direction is positioned between ball raceways, representing the loading direction B in the dimension table. Generally, this can be subjected to load bigger than loading direction A.




Fig. 1.1 Loading direction A




Fig. 1.2 Loading direction B

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Lubrication

Grease is not pre-packed in the LM series, so please perform adequate lubrication as needed. Both of oil lubrication and grease lubrication are available in the LM series. For grease lubrication, use of high-quality lithium-soap base grease is recommended.

Precaution for Use

①Fitting

For fitting with a housing hole, clearance fit is usually used but transition fit can also be used for special usage. For adjustable clearance type and open type, the shaft diameter shall be set as much as possible to less than the lower limit of the allowance of the inscribed circle diameter, and while the dimension of a housing hole shall be set to more than the upper limit of the allowance of the outside diameter of the external cylinder.

Table 2 Recommended fit

Models and accuracy class		Tolerance class			
		Shaft		Housing hole	
		Ordinary clearance	Interference fit	Clearance fit	Transition fit
LM, LMB	High	f6, g6	h6	H7	J7
	Precision	f5, g5	h5	H6	J6
LME	—	h6	j6	H7	J7

②Clearance

For adjustable clearance type and open type, clearance adjustment can be easily performed if the unit is mounted into a housing with the bore diameter dimension adjustable. However, if a large preload is produced due to the clearance adjustment, the deformation at the contact portion of the external cylinder and ball may become large, thereby deteriorating the life. Therefore, it is recommended to finish the shaft dimension within the allowance of the recommended fitting and set the clearance at zero or under a slightly-preloaded condition. Although the clearance adjustment is performed while measuring the clearance with a dial gauge after fitting in a shaft, a method is generally taken to rotate the shaft under unloaded condition during clearance adjustment and stop the adjustment at the timing when detecting a slight resistance. At this time, the Linear Bushing clearance is at zero or under a slight preload condition. Meanwhile, the clearance adjustment for open type with three-row ball raceways cannot be performed.

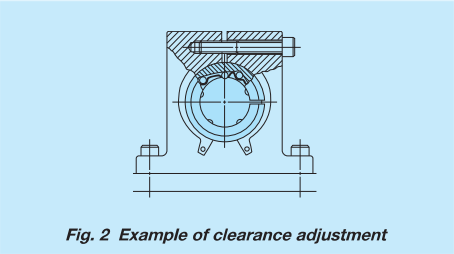


Fig. 2 Example of clearance adjustment

③Raceway

Since LM series operates with a shaft as a raceway surface, the shaft should be heat-treated and ground. Recommended values for surface hardness and roughness of the shaft are shown in Table 3 and the recommended value for the minimum effective hardening depth is shown in Table 4.

Table 3 Surface hardness and roughness of shaft

Item	Recommended value	Remark
Surface hardness	58~64HRC	When the surface hardness is low, multiply the load rating by hardness factor (1) .
Surface roughness	0.2 μmRa or lower (0.8 μmRy or lower)	Where accuracy standard is low, around 0.8 μmRa (3.2 μmRy) is also allowed.

Note (1) For hardness factor, refer to Fig. 3 in page III-5.

Table 4 Minimum effective hardening depth of shaft unit : mm

Shaft diameter		Recommended value for minimum effective hardening depth
Over	Incl.	
—	28	0.8
28	50	1.0
50	100	1.5
100	150	2.0

④When accompanied by rotational motion

LM series units support only linear motion but do not support rotational motion. When performing rotational motion and linear motion of short stroke length, IKO Stroke Rotary Bushing is recommended to be used. And, for the usage requiring rotational motion and linear motion of long stroke length, it is recommended to use in combination with IKO needle bearing as shown in Fig. 3.

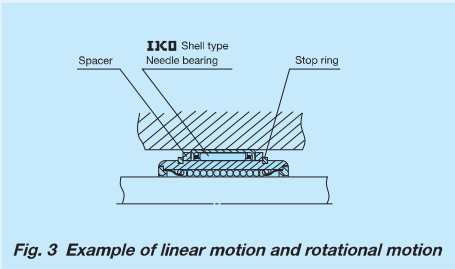


Fig. 3 Example of linear motion and rotational motion

⑤Precaution for use of open type with three-row linear bushing

The open type with three-row Linear Bushing of balls may only be used with load direction indicated in Fig. 4.1. In addition, if two of them are used in parallel, mount them as indicated in 4.2, taking into account the load distribution to rolling elements. And, note that the clearance adjustment cannot be performed.




Fig. 4.1




Fig. 4.2

⑥Operating temperature

If the retainer is made of carbon steel, it can withstand higher temperature. However, if you use it in an environment exceeding 100°C, please contact IKO. The maximum operating temperature of synthetic resin made products is 100°C and temperature up to 80°C is allowed for continuous operation.

⑦Mounting

When pressing an external cylinder into the housing hole, do is softly while applying a jig to the sides of the external cylinder not to hit the end plate (see Fig. 5). After pressing-in, use a stop ring or stopper plate to fix it in an axial direction. When inserting shaft after mounting the external cylinder, be careful not to shock the ball or retainer. In addition, when two shafts are used, mount one accurately and then the other by referring to the first one so as to ensure parallelism with it. Typical mounting example is shown in Fig. 6.

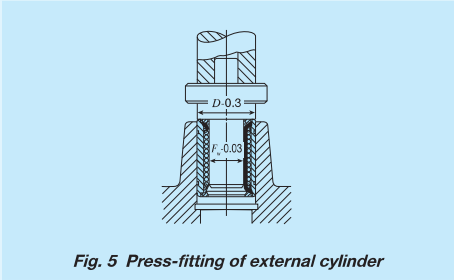


Fig. 5 Press-fitting of external cylinder

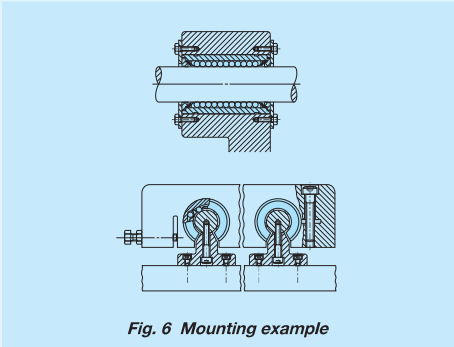


Fig. 6 Mounting example

Related Products

Slide shaft

To make full use of performance of the LM series, we also offer shaft with high accuracy for Linear Bushing grounded after heat treatment. If you are interested, contact IKO. Conventional ordinary type shafts are also available.

Felt seals for Linear Bushing


Though the type with seal is standardized for the LM series, the type without seal and felt seals may be used together when emphasis is put on rolling friction resistance. Dimensions for felt seals are shown in Table 5.

Table 5 Dimensions of felt seals for Linear Bushing

unit: mm			
Identification number	d	D	B
FLM 6	6	12	2
FLM 8	8	15	2
FLM 10	10	19	3
FLM 13	13	23	3
FLM 16	16	28	4
FLM 20	20	32	4
FLM 25	25	40	5
FLM 30	30	45	5
FLM 35	35	52	5
FLM 40	40	60	5
FLM 50	50	80	10
FLM 60	60	90	10
FLM 80	80	120	10
FLM 100	100	150	10

Remark: For adjustable clearance type, open type and inch series felt seals, contact IKO.

	Standard type						Adjustable clearance type						Open type					
Shape	LM LM...N						LM... AJ LM...N AJ						LM... OP LM...N OP					
																		
Shaft diameter	6	8	10	12	13	16	6	8	10	12	13	16	—	—	10	12	13	16
	20	25	30	35	40	50	20	25	30	35	40	50	20	25	30	35	40	50
	60	80	100	120	150		60	80	100	120	150		60	80	100	120	150	

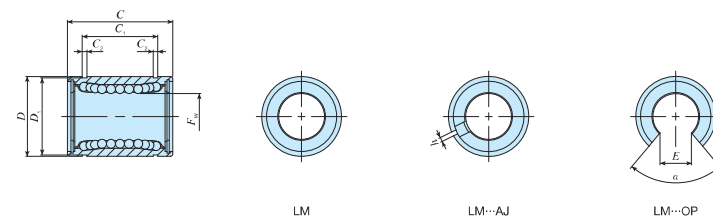

Shaft diameter mm	Identification number											Nominal dimensions and tolerances mm														Eccentricity		Basic dynamic load rating		Basic static load rating		
	Standard type	Ball raceway	Mass (Ref.) g	Adjustable clearance type		Ball raceway	Mass (Ref.) g	Open type	Ball raceway	Mass (Ref.) g		F_w	Dim. F_w tolerance μm		D	Dim. D tolerance μm	C	Dim. C tolerance μm	$C_1^{(1)}$	Dim. C_1 tolerance μm	C_2	D_1	h	E	α	Maximum μm	P	H	C		C_0	
				Load direction A N	Load direction B N								Load direction A N	Load direction B N																		
6	LM 61219	4	8	—	—	—	—	—	—	—	6	—	—	12	—	19	—	13.5	—	1.1	11.5	—	—	—	—	—	—	80.7	92.7	167	237	
8	LM 81517	4	13	—	—	—	—	—	—	—	8	—	—	15	0 -11	17	—	11.5	—	1.1	14.3	—	—	—	—	—	—	87.4	100	160	226	
	LM 81517 N	4	10.4	LM 81517 N	AJ*	4	10	—	—	—	8	—	—	15	—	24	—	17.5	—	1.1	14.3	—	—	—	—	—	—	121	139	255	361	
	LM 81524	4	18	—	—	—	—	—	—	—	8	—	—	15	—	24	—	17.5	—	1.1	14.3	—	—	—	—	—	—	121	139	255	361	
10	LM 101929	4	30	—	—	—	—	—	—	—	10	—	—	19	—	29	—	22	—	1.3	18	—	—	—	—	—	—	179	206	354	501	
	LM 101929 N	4	27.5	LM 101929 N	AJ*	4	26.5	LM 101929 N	OP*	3	18	—	—	19	—	29	0	22	0	1.3	18	—	—	—	—	—	—	179	206	354	501	
12	LM 122130	4	29	LM 122130	AJ*	4	28	LM 122130	OP*	3	19	—	—	21	—	30	—	23	—	1.3	20	1.5	8	80	—	—	—	259	298	503	711	
	LM 122130 N	4	31.5	LM 122130 N	AJ*	4	30.5	LM 122130 N	OP*	3	22	—	—	21	0	30	-200	23	-200	1.3	20	1.5	8	80	—	—	—	259	298	503	711	
13	LM 132332	4	43	LM 132332	AJ*	4	42	LM 132332	OP*	3	31	—	—	23	-13	32	—	23	—	1.3	22	1.5	9	80	—	—	—	266	306	506	716	
	LM 132332 N	4	42.5	LM 132332 N	AJ*	4	41.5	LM 132332 N	OP*	3	31	—	—	23	—	32	—	23	—	1.3	22	1.5	9	80	—	—	—	266	306	506	716	
16	LM 162837	4	70	LM 162837	AJ*	4	69.5	LM 162837	OP*	3	58	—	—	28	—	37	—	26.5	—	1.6	27	1.5	11	80	—	—	—	426	489	766	1 080	
	LM 162837 N	4	69	LM 162837 N	AJ*	4	68	LM 162837 N	OP*	3	52	—	—	28	—	37	—	26.5	—	1.6	27	1.5	11	80	—	—	—	426	489	766	1 080	
20	LM 203242	5	92	LM 203242	AJ*	5	91	LM 203242	OP*	4	79	—	—	32	—	42	—	30.5	—	1.6	30.5	1.5	11	60	—	—	—	562	668	1 010	1 470	
	LM 203242 N	5	87	LM 203242 N	AJ*	5	85	LM 203242 N	OP*	4	69	—	—	32	—	42	—	30.5	—	1.6	30.5	1.5	11	60	—	—	—	562	668	1 010	1 470	
25	LM 254059	6	226	LM 254059	AJ*	6	222	LM 254059	OP*	5	203	—	—	40	0 -16	59	—	41	—	1.85	38	2	12	50	—	—	—	920	974	1 780	2 280	
	LM 254059 N	6	220	LM 254059 N	AJ*	6	216	LM 254059 N	OP*	5	188	—	—	40	—	59	—	41	—	1.85	38	2	12	50	—	—	—	920	974	1 780	2 280	
30	LM 304564	6	253	LM 304564	AJ*	6	250	LM 304564	OP*	5	228	—	—	45	—	64	—	44.5	—	1.85	43	2.5	15	50	—	—	—	1 350	1 430	2 500	3 200	
	LM 304564 N	6	250	LM 304564 N	AJ*	6	245	LM 304564 N	OP*	5	210	—	—	45	—	64	—	44.5	—	1.85	43	2.5	15	50	—	—	—	1 350	1 430	2 500	3 200	
35	LM 355270	6	388	LM 355270	AJ*	6	380	LM 355270	OP*	5	355	—	—	52	—	70	0 -300	49.5	0 -300	2.1	49	2.5	17	50	—	—	—	1 610	1 710	3 080	3 940	
	LM 355270 N	6	380	LM 355270 N	AJ*	6	375	LM 355270 N	OP*	5	335	—	—	52	—	70	—	49.5	—	2.1	49	2.5	17	50	—	—	—	1 610	1 710	3 080	3 940	
40	LM 406080	6	596	LM 406080	AJ*	6	585	LM 406080	OP*	5	546	—	—	60	0 -19	80	—	60.5	—	2.1	57	3	20	50	—	—	—	2 030	2 150	3 620	4 640	
	LM 406080 N	6	585	LM 406080 N	AJ*	6	579	LM 406080 N	OP*	5	500	—	—	60	—	80	—	60.5	—	2.1	57	3	20	50	—	—	—	2 030	2 150	3 620	4 640	
50	LM 5080100	6	1 615	LM 5080100	AJ*	6	1 595	LM 5080100	OP*	5	1 420	—	—	80	—	100	—	74	—	2.6	76.5	3	25	50	—	—	—	3 940	4 180	7 130	9 120	
	LM 5080100 N	6	1 580	LM 5080100 N	AJ*	6	1 560	LM 5080100 N	OP*	5	1 340	—	—	80	—	100	—	74	—	2.6	76.5	3	25	50	—	—	—	3 940	4 180	7 130	9 120	


Note (1) The width of hub for fixing with circlip should be the value obtained by subtracting a circlip width value times two from the C_1 dimension.

Remarks 1. "P" and "H" in Dim. F_w tolerance and Eccentricity represent precision and high, respectively.

2. Standard type and adjustable clearance type end plates are fixed with stop ring for holes.

3. The identification numbers with * are our semi-standard items.

	Standard type						Adjustable clearance type						Open type					
Shape	LM LM...N						LM... AJ LM...N AJ						LM... OP LM...N OP					
																		
Shaft diameter	6	8	10	12	13	16	6	8	10	12	13	16	—	—	10	12	13	16
	20	25	30	35	40	50	20	25	30	35	40	50	20	25	30	35	40	50
	60	80	100	120	150		60	80	100	120	150		60	80	100	120	150	

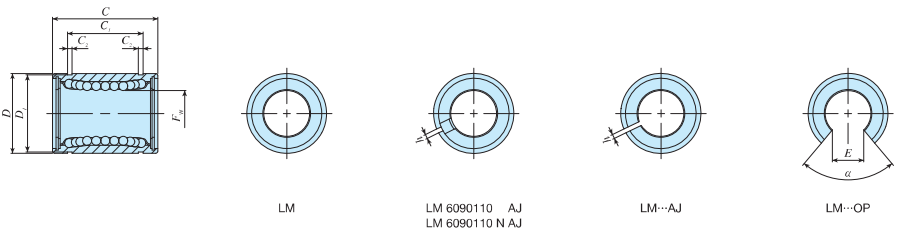


Shaft diameter mm	Identification number										Nominal dimensions and tolerances mm																Eccentricity		Basic dynamic load rating		Basic static load rating	
	Standard type	Ball raceway	Mass (Ref.) g	Adjustable clearance type		Ball raceway	Mass (Ref.) g	Open type		Ball raceway	Mass (Ref.) g		F_w	Dim. F_w tolerance μm		D	Dim. D tolerance μm	C	Dim. C tolerance μm	$C_1^{(1)}$	Dim. C_1 tolerance μm	C_2	D_1	h	E	α Degree	Maximum μm		C		C_0	
														P	H												P	H	Load direction A N	Load direction B N	Load direction A N	Load direction B N
60	LM 6090110	6	1 817	LM 6090110 AJ*	6	1 788	LM 6090110 OP*	5	1 650			60	0 -9	0 -15	90	0 -22	110	0 -300	85	0 -300	3.15	86.5	3	30	50	17	25	4 760	5 040	8 150	10 400	
80	LM 80120140*	6	4 520	LM 80120140 AJ*	6	4 400	LM 80120140 OP*	5	3 750			80			120		140		105.5		4.15	116	3	40	50			8 710	9 220	14 500	18 500	
100	LM 100150175*	6	8 600	LM 100150175 AJ*	6	8 540	LM 100150175 OP*	5	7 200			100	0	0	150	0	175	0	125.5	0	4.15	145	3	50	50			14 500	15 300	22 800	29 200	
120	LM 120180200*	8	15 000	LM 120180200 AJ*	8	14 900	LM 120180200 OP*	6	11 600			120	-10	-20	180	-25	200	-400	158.6	-400	4.15	175	3	85	80			25 800	25 500	44 300	49 400	
150	LM 150210240*	8	20 250	LM 150210240 AJ*	8	20 150	LM 150210240 OP*	6	15 700			150	0 -13	0 -25	210	0 -29	240		170.6		5.15	204	3	105	80	25	40	35 600	35 100	61 200	68 200	

Note (1) The width of hub for fixing with circlip should be the value obtained by subtracting a circlip width value times two from the C_1 dimension.

- Remarks 1. "P" and "H" in Dim. F_w tolerance and Eccentricity represent precision and high, respectively.
2. Standard type and adjustable clearance type (shaft diameter 60 mm) end plates are fixed with stop ring for holes.
3. The identification numbers with * are our semi-standard items.

	Standard type						Adjustable clearance type						Open type					
Shape	LM··· UU LM··N UU						LM··· UU AJ LM··N UU AJ						LM··· UU OP LM··N UU OP					
																		
Shaft diameter	6	8	10	12	13	16	6	8	10	12	13	16	—	—	10	12	13	16
	20	25	30	35	40	50	20	25	30	35	40	50	20	25	30	35	40	50
	60	80	100	120	150		60	80	100	120	150		60	80	100	120	150	

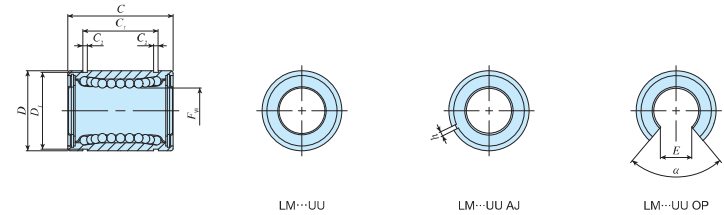

Shaft diameter mm	Identification number										Nominal dimensions and tolerances mm														Eccentricity		Basic dynamic load rating		Basic static load rating			
	Standard type		Ball raceway	Mass (Ref.) g	Adjustable clearance type		Ball raceway	Mass (Ref.) g	Open type		Ball raceway	Mass (Ref.) g	F_w	Dim. F_w tolerance μm		D	Dim. D tolerance μm	C	Dim. C tolerance μm	C_1 (1)	Dim. C_1 tolerance μm	C_2	D_1	h			E	α	Maximum μm	C		C_0
														Load direction A N	Load direction B N										Load direction A N	Load direction B N						
													P	H													P	H				
6	LM 61219 UU	4	8									6			12		19		13.5		1.1	11.5	1	—	—				80.7	92.7	167	237
8	LM 81517 UU	4	13									8			15	0 −11	17		11.5		1.1	14.3	1	—	—	—			87.4	100	160	226
	LM 81517 N UU	4	10.4	LM 81517 N UU AJ*	4	10						8			15		24		17.5		1.1	14.3	1	—	—	—			121	139	255	361
	LM 81524 UU	4	18									8			15				17.5		1.1	14.3	1	—	—	—			121	139	255	361
	LM 81524 N UU	4	15	LM 81524 N UU AJ*	4	14.7						8			15				17.5		1.1	14.3	1	—	—	—			121	139	255	361
10	LM 101929 UU	4	30									10	0 −6	0 −9	19		29	0	22	0	1.3	18	1	—	—	—	8	12	179	206	354	501
	LM 101929 N UU	4	27.5	LM 101929 N UU AJ*	4	26.5	LM 101929 N UU OP*	3	18			10			19		29	0	22	0	1.3	18	1	—	—	—	8	12	179	206	354	501
12	LM 122130 UU	4	29	LM 122130 UU AJ*	4	28	LM 122130 UU OP*	3	19			12			21		30	−200	23	−200	1.3	20	1.5	8	80			259	298	503	711	
	LM 122130 N UU	4	31.5	LM 122130 N UU AJ*	4	30.5	LM 122130 N UU OP*	3	22			12			21	0 −13	30	−200	23	−200	1.3	20	1.5	8	80			259	298	503	711	
13	LM 132332 UU	4	43	LM 132332 UU AJ*	4	42	LM 132332 UU OP*	3	31			13			23		32		23		1.3	22	1.5	9	80			266	306	506	716	
	LM 132332 N UU	4	42.5	LM 132332 N UU AJ*	4	41.5	LM 132332 N UU OP*	3	31			13			23		32		23		1.3	22	1.5	9	80			266	306	506	716	
16	LM 162837 UU	4	70	LM 162837 UU AJ*	4	69.5	LM 162837 UU OP*	3	58			16			28		37		26.5		1.6	27	1.5	11	80			426	489	766	1 080	
	LM 162837 N UU	4	69	LM 162837 N UU AJ*	4	68	LM 162837 N UU OP*	3	52			16			28		37		26.5		1.6	27	1.5	11	80			426	489	766	1 080	
20	LM 203242 UU	5	92	LM 203242 UU AJ*	5	91	LM 203242 UU OP*	4	79			20			32		42		30.5		1.6	30.5	1.5	11	60			562	668	1 010	1 470	
	LM 203242 N UU	5	87	LM 203242 N UU AJ*	5	85	LM 203242 N UU OP*	4	69			20			32		42		30.5		1.6	30.5	1.5	11	60			562	668	1 010	1 470	
25	LM 254059 UU	6	226	LM 254059 UU AJ*	6	222	LM 254059 UU OP*	5	203			25	0 −7	0 −10	40	0 −16	59		41		1.85	38	2	12	50	10	15	920	974	1 780	2 280	
	LM 254059 N UU	6	220	LM 254059 N UU AJ*	6	216	LM 254059 N UU OP*	5	188			25			40		59		41		1.85	38	2	12	50	10	15	920	974	1 780	2 280	
30	LM 304564 UU	6	253	LM 304564 UU AJ*	6	250	LM 304564 UU OP*	5	228			30			45		64		44.5		1.85	43	2.5	15	50			1 350	1 430	2 500	3 200	
	LM 304564 N UU	6	250	LM 304564 N UU AJ*	6	245	LM 304564 N UU OP*	5	210			30			45		64		44.5		1.85	43	2.5	15	50			1 350	1 430	2 500	3 200	
35	LM 355270 UU	6	387	LM 355270 UU AJ*	6	380	LM 355270 UU OP*	5	355			35			52		70	0 −300	49.5	0 −300	2.1	49	2.5	17	50			1 610	1 710	3 080	3 940	
	LM 355270 N UU	6	380	LM 355270 N UU AJ*	6	375	LM 355270 N UU OP*	5	335			35			52		70	0 −300	49.5	0 −300	2.1	49	2.5	17	50			1 610	1 710	3 080	3 940	
40	LM 406080 UU	6	596	LM 406080 UU AJ*	6	585	LM 406080 UU OP*	5	546			40	0 −8	0 −12	60	0 −19	80		60.5		2.1	57	3	20	50	12	20	2 030	2 150	3 620	4 640	
	LM 406080 N UU	6	585	LM 406080 N UU AJ*	6	579	LM 406080 N UU OP*	5	500			40			60		80		60.5		2.1	57	3	20	50	12	20	2 030	2 150	3 620	4 640	
50	LM 5080100 UU	6	1 615	LM 5080100 UU AJ*	6	1 595	LM 5080100 UU OP*	5	1 420			50			80		100		74		2.6	76.5	3	25	50			3 940	4 180	7 130	9 120	
	LM 5080100 N UU	6	1 580	LM 5080100 N UU AJ*	6	1 560	LM 5080100 N UU OP*	5	1 340			50			80		100		74		2.6	76.5	3	25	50			3 940	4 180	7 130	9 120	


Note (1) The width of hub for fixing with circlip should be the value obtained by subtracting a circlip width value times two from the C_1 dimension.

Remarks 1. "P" and "H" in Dim. F_w tolerance and Eccentricity represent precision and high, respectively.

2. Standard type and adjustable clearance type end plates are fixed with stop ring for holes.

3. The identification numbers with * are our semi-standard items.

	Standard type						Adjustable clearance type						Open type					
Shape	LM··· UU LM···N UU						LM··· UU AJ LM···N UU AJ						LM··· UU OP LM···N UU OP					
																		
Shaft diameter	6	8	10	12	13	16	6	8	10	12	13	16	—	—	10	12	13	16
	20	25	30	35	40	50	20	25	30	35	40	50	20	25	30	35	40	50
	60	80	100	120	150		60	80	100	120	150		60	80	100	120	150	

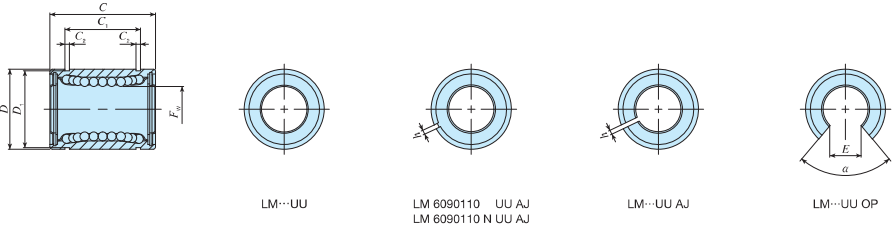


Shaft diameter mm	Identification number										Nominal dimensions and tolerances mm														Eccentricity		Basic dynamic load rating		Basic static load rating	
	Standard type	Ball raceway	Mass (Ref.) g	Adjustable clearance type	Ball raceway	Mass (Ref.) g	Open type	Ball raceway	Mass (Ref.) g		F_w	Dim. F_w tolerance μm		D	Dim. D tolerance μm	C	Dim. C tolerance μm	C_1 (°)	Dim. C_1 tolerance μm	C_2	D_1	h	E	α	Maximum μm		Load direction A N	Load direction B N	Load direction A N	Load direction B N
												P	H												P	H				
60	LM 6090110 UU	6	1 817	LM 6090110 UU AJ*	6	1 788	LM 6090110 UU OP*	5	1 650	60	0	0	90	0	110	0	85	0	3.15	86.5	3	30	50	17	25	4 760	5 040	8 150	10 400	
	LM 6090110 N UU	6	1 787	LM 6090110 N UU AJ*	6	1 757	LM 6090110 N UU OP*	5	1 610		-9	-15		-22		-300		-300												
80	LM 80120140 UU*	6	4 400	LM 80120140 UU AJ*	6	4 360	LM 80120140 UU OP*	5	3 640	80			120		140		105.5		4.15	116	3	40	50			8 710	9 220	14 500	18 500	
100	LM 100150175 UU*	6	8 500	LM 100150175 UU AJ*	6	8 450	LM 100150175 UU OP*	5	7 120	100	0	0	150	0	175	0	125.5	0	4.15	145	3	50	50	20	30	14 500	15 300	22 800	29 200	
120	LM 120180200 UU*	8	14 700	LM 120180200 UU AJ*	8	14 600	LM 120180200 UU OP*	6	11 400	120	-10	-20	180	-25	200	-400	158.6	-400	4.15	175	3	85	80			25 800	25 500	44 300	49 400	
150	LM 150210240 UU*	8	19 900	LM 150210240 UU AJ*	8	19 800	LM 150210240 UU OP*	6	15 400	150	0	0	210	0	240		170.6		5.15	204	3	105	80	25	40	35 600	35 100	61 200	68 200	

Note (1) The width of hub for fixing with circlip should be the value obtained by subtracting a circlip width value times two from the C_1 dimension.

- Remarks 1. "P" and "H" in Dim. F_w tolerance and Eccentricity represent precision and high, respectively.
2. Standard type and adjustable clearance type (shaft diameter 60 mm) end plates are fixed with stop ring for holes.
3. The identification numbers with * are our semi-standard items.

	Standard type					Adjustable clearance type					Open type							
Shape	LME LME...N					LME... AJ LME...N AJ					LME... OP LME...N OP							
																		
Shaft diameter	5	8	12	16	20	25	5	8	12	16	20	25	—	—	12	16	20	25
	30	40	50	60	80		30	40	50	60	80		30	40	50	60	80	

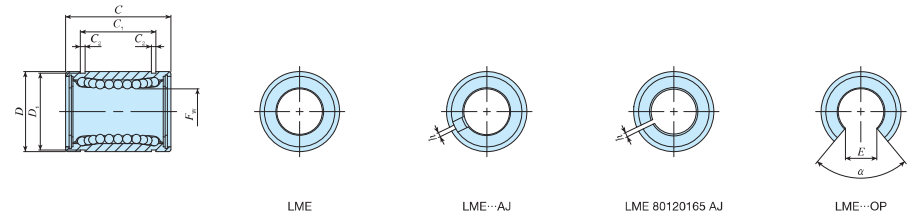


Shaft diameter mm	Identification number											Nominal dimensions and tolerances mm															Eccentricity Maximum μm	Basic dynamic load rating		Basic static load rating	
	Standard type	Ball raceway	Mass (Ref.) g	Adjustable clearance type		Mass (Ref.) g	Open type		Ball raceway	Mass (Ref.) g		F_w	Dim. F_w tolerance μm	D	Dim. D tolerance μm	C	Dim. C tolerance μm	C_1 (1)	Dim. C_1 tolerance μm	C_2	D_1	h	E	α Degree	Load direction A N	Load direction B N		Load direction A N	Load direction B N		
5	LME 51222 N*	4	11	LME 51222 N AJ*	4	9.5	—	—	—	—	5		12		22		14.5		1.1	11.5	1	—	—	12				90.8	104	219	310
8	LME 81625 *	4	20	—	—	—	—	—	—	8	+ 8 0	16	- 8	25		16.5		1.1	15.2	1	—	—						121	139	255	361
	LME 81625 N*	4	20	LME 81625 N AJ*	4	19.5	—	—																							
12	LME 122232 *	4	41.5	LME 122232 AJ*	4	40.5	LME 122232 OP*	3	32	12		22	0 - 9	32	0 -200	22.9	0 -200	1.3	21	1.5	7.5	78						259	298	503	711
	LME 122232 N*	4	40	LME 122232 N AJ*	4	39	LME 122232 N OP*	3	30																						
16	LME 162636 *	4	56.5	LME 162636 AJ*	4	55.5	LME 162636 OP*	3	48	16	+ 9 - 1	26	- 9	36		24.9		1.3	24.9	1.5	10	78					283	325	514	726	
	LME 162636 N*	4	55	LME 162636 N AJ*	4	54	LME 162636 N OP*	3	46																						
20	LME 203245 *	5	97	LME 203245 AJ*	5	96	LME 203245 OP*	4	84	20		32		45		31.5		1.6	30.3	2	10	60					562	668	1 010	1 470	
	LME 203245 N*	5	91	LME 203245 N AJ*	5	90	LME 203245 N OP*	4	75																						
25	LME 254058 *	6	222	LME 254058 AJ*	6	219	LME 254058 OP*	5	195	25	+ 11 - 1	40	0 - 11	58		44.1		1.85	37.5	2	12.5	60					920	974	1 780	2 280	
	LME 254058 N*	6	215	LME 254058 N AJ*	6	212	LME 254058 N OP*	5	181																						
30	LME 304768 *	6	338	LME 304768 AJ*	6	333	LME 304768 OP*	5	309	30		47		68	0	52.1	0	1.85	44.5	2	12.5	50					1 350	1 430	2 500	3 200	
	LME 304768 N*	6	325	LME 304768 N AJ*	6	320	LME 304768 N OP*	5	272																						
40	LME 406280 *	6	712	LME 406280 AJ*	6	701	LME 406280 OP*	5	665	40		62	0 - 13	80	-300	60.6	-300	2.15	59	3	16.8	50					2 030	2 150	3 620	4 640	
	LME 406280 N*	6	705	LME 406280 N AJ*	6	694	LME 406280 N OP*	5	600																						
50	LME 5075100 *	6	1 147	LME 5075100 AJ*	6	1 127	LME 5075100 OP*	5	1 080	50	+ 13 - 2	75		100		77.6		2.65	72	3	21	50					3 940	4 180	7 130	9 120	
	LME 5075100 N*	6	1 130	LME 5075100 N AJ*	6	1 110	LME 5075100 N OP*	5	970																						
60	LME 6090125 *	6	2 051	LME 6090125 AJ*	6	2 001	LME 6090125 OP*	5	1 900	60		90	0 - 15	125	0	101.7	0	3.15	86.5	3	27.2	54					4 760	5 040	8 150	10 400	
	LME 6090125 N*	6	2 050	LME 6090125 N AJ*	6	2 000	LME 6090125 N OP*	5	1 580																						
80	LME 80120165 *	6	5 140	LME 80120165 AJ*	6	5 000	LME 80120165 OP*	5	4 380		80	+ 16 - 4	120		165	-400	133.7	-400	4.15	116	3	36.3	54				8 710	9 220	14 500	18 500	

Note (1) The width of hub for fixing with circlip should be the value obtained by subtracting a circlip width value times two from the C_1 dimension.


Remarks 1. High carbon steel-made retainer (shaft diameter 8 mm), and standard type and adjustable clearance type (shaft diameter 12 mm to 60 mm) end plates are fixed with stop ring for holes.

2. The identification numbers with * are our semi-standard items.


	Standard type						Adjustable clearance type						Open type					
Shape	LME… UU LME…N UU						LME… UU AJ LME…N UU AJ						LME… UU OP LME…N UU OP					
																		
Shaft diameter	5	8	12	16	20	25	5	8	12	16	20	25	—	—	12	16	20	25
	30	40	50	60	80		30	40	50	60	80		30	40	50	60	80	




LME...UU



LME...UU AJ



LME 80120165 UU AJ



LME...UU OP

Shaft diameter mm	Identification number											Nominal dimensions and tolerances mm														Excentricity Maximum μm	Basic dynamic load rating		Basic static load rating			
	Standard type		Ball raceway	Mass (Ref.) g	Adjustable clearance type		Ball raceway	Mass (Ref.) g	Open type			Ball raceway	Mass (Ref.) g	F_w	Dim. F_w tolerance μm	D	Dim. D tolerance μm	C	Dim. C tolerance μm	$C_1^{(1)}$	Dim. C_1 tolerance μm	C_2	D_1	h	E		α Degree		C		C_0	
																													Load direction A N	Load direction B N	Load direction A N	Load direction B N
5	LME	51222 N UU*	4	11	LME	51222 N UU AJ*	4	9.5	—	—	—	—	5	+ 8 0	12	0 — 8	22	0 —200	14.5	0 —200	1.1	11.5	1	—	—	12		90.8	104	219	310	
8	LME	81625 UU*	4	20	—	—	—	—	—	—	—	8	16		—	25	16.5				1.1	15.2	— 1	—	—				121	139	255	361
	LME	81625 N UU*	4	20	LME	81625 N UU AJ*	4	19	—	—	—	—	8	16	—	25	16.5		1.1	15.2	— 1	—	—			121	139	255	361			
12	LME	122232 UU*	4	41.5	LME	122232 UU AJ*	4	40.5	LME	122232 UU OP*	3	32	12		22	0 — 9	32	0 —200	22.9	0 —200	1.3	21	1.5	7.5	78		259	298	503	711		
	LME	122232 N UU*	4	40	LME	122232 N UU AJ*	4	39	LME	122232 N UU OP*	3	30									1.3	24.9	1.5	10	78		283	325	514	726		
16	LME	162636 UU*	4	56.5	LME	162636 UU AJ*	4	55.5	LME	162636 UU OP*	3	48	16	+ 9 — 1	26	0 — 9	36	24.9	0 —300	52.1	0 —300	1.85	37.5	2	12.5	60	15	920	974	1 780	2 280	
	LME	162636 N UU*	4	55	LME	162636 N UU AJ*	4	54	LME	162636 N UU OP*	3	46										1.6	30.3	2	10	60		562	668	1 010	1 470	
20	LME	203245 UU*	5	97	LME	203245 UU AJ*	5	96	LME	203245 UU OP*	4	84	20		32	0 —11	45	31.5	0 —300	52.1	0 —300	1.85	44.5	2	12.5	50	17	2 030	2 150	3 620	4 640	
	LME	203245 N UU*	5	91	LME	203245 N UU AJ*	5	90	LME	203245 N UU OP*	4	75										1.6	30.3	2	10	60		562	668	1 010	1 470	
25	LME	254058 UU*	6	222	LME	254058 UU AJ*	6	219	LME	254058 UU OP*	5	195	25	+11 — 1	40	0 —11	58	44.1	0 —300	52.1	0 —300	1.85	37.5	2	12.5	60	15	920	974	1 780	2 280	
	LME	254058 N UU* ⁽²⁾	6	215	LME	254058 N UU AJ* ⁽²⁾	6	212	LME	254058 N UU OP* ⁽²⁾	5	181										1.85	44.5	2	12.5	50		1 350	1 430	2 500	3 200	
30	LME	304768 UU*	6	338	LME	304768 UU AJ*	6	333	LME	304768 UU OP*	5	309	30		47	0 —13	68	52.1	0 —300	52.1	0 —300	1.85	44.5	2	12.5	50	17	1 350	1 430	2 500	3 200	
	LME	304768 N UU*	6	325	LME	304768 N UU AJ*	6	320	LME	304768 N UU OP*	5	272										2.15	59	3	16.8	50		2 030	2 150	3 620	4 640	
40	LME	406280 UU*	6	712	LME	406280 UU AJ*	6	701	LME	406280 UU OP*	5	665	40	+13 — 2	62	0 —13	80	60.6	0 —300	52.1	0 —300	2.15	59	3	16.8	50	17	2 030	2 150	3 620	4 640	
	LME	406280 N UU*	6	705	LME	406280 N UU AJ*	6	694	LME	406280 N UU OP*	5	600										2.65	72	3	21	50		3 940	4 180	7 130	9 120	
50	LME	5075100 UU*	6	1 147	LME	5075100 UU AJ*	6	1 127	LME	5075100 UU OP*	5	1 080	50		75	0 —13	100	77.6	0 —300	52.1	0 —300	2.65	72	3	21	50	17	3 940	4 180	7 130	9 120	
	LME	5075100 N UU*	6	1 130	LME	5075100 N UU AJ*	6	1 110	LME	5075100 N UU OP*	5	970										2.65	72	3	21	50		3 940	4 180	7 130	9 120	
60	LME	6090125 UU*	6	2 051	LME	6090125 UU AJ*	6	2 001	LME	6090125 UU OP*	5	1 900	60		90	0 —15	125	0 —400	101.7	0 —400	3.15	86.5	3	27.2	54	20	4 760	5 040	8 150	10 400		
	LME	6090125 N UU*	6	2 050	LME	6090125 N UU AJ*	6	2 000	LME	6090125 N UU OP*	5	1 580									3.15	86.5	3	27.2	54		4 760	5 040	8 150	10 400		
80	LME	80120165 UU*	6	5 030	LME	80120165 UU AJ*	6	4 930	LME	80120165 UU OP*	5	4 210	80	+16 — 4	120	—	165	—	133.7	—	400	400	4.15	116	3	36.3	54		8 710	9 220	14 500	18 500

Notes ⁽¹⁾ The width of hub for fixing with circlip should be the value obtained by subtracting a circlip width value times two from the C_1 dimension.



⁽²⁾ The seal is slightly off from the external cylinder end.

Remarks 1. High carbon steel-made retainer (shaft diameter 8 mm), and standard type and adjustable clearance type (shaft diameter 12 mm to 60 mm) end plates are fixed with stop ring for holes.


2. The identification numbers with * are our semi-standard items.

IKO Linear Bushing Inch Series


	Standard type				Adjustable clearance type				Open type			
Shape	LMB LMB...N				LMB... AJ LMB...N AJ				LMB... OP LMB...N OP			
Shaft diameter	6.350	9.525	12.700	15.875	6.350	9.525	12.700	15.875	—	—	12.700	15.875
	19.050	25.400	31.750	38.100	19.050	25.400	31.750	38.100	19.050	25.400	31.750	38.100
	50.800	63.500	76.200	101.600	50.800	63.500	76.200	101.600	50.800	63.500	76.200	101.600



LMB



LMB...AJ



LMB 406080 AJ
LMB 487296 AJ
LMB 6496128 AJ



LMB...OP

Shaft diameter	Identification number										Nominal dimensions and tolerances inch/mm																Eccentricity	Basic dynamic load rating		Basic static load rating			
	Standard type	Ball raceway	Mass (Ref.)	Adjustable clearance type		Ball raceway	Mass (Ref.)	Open type	Ball raceway	Mass (Ref.)	F_w	Dim. F_w tolerance μm		D	Dim. D tolerance μm	C	Dim. C tolerance μm	C_1 (°)	Dim. C_1 tolerance μm	C_2	D_1	h	E	α	Maximum μm	C		C_0					
				Load direction A	Load direction B							Load direction A	Load direction B																				
mm (inch)			g			g				g	P	H												P	H	N	N	N	N				
6.350 (1/4)	LMB 4812 *	4	10.5		—	—			—	—	1/4			1/2	0	3/4											82.6	94.9	168	238			
	LMB 4812 N*	4	8.5	LMB 4812 N AJ*	4	8			—	—	6.350			12.700	-11	19.050				0.992	11.906	— 1	—	—									
9.525 (3/8)	LMB 61014 *	4	16.5		—	—			—	—	3/8			5/8		7/8				0.992	14.935	— 1	—	—			94.8	109	174	246			
	LMB 61014 N*	4	12.5	LMB 61014 N AJ*	4	12			—	—	9.525	0	0	15.875		22.225				16.15													
12.700 (1/2)	LMB 81420 *	4	37.5	LMB 81420 AJ*	4	36.5	LMB 81420 OP*	3	28		1/2	-6	-9	7/8	0	1 1/4	0		24.46	0	1.168	20.853	1.5	7.9	80		264	303	505	714			
	LMB 81420 N*	4	37	LMB 81420 N AJ*	4	36	LMB 81420 N OP*	3	27		12.700			22.225	-13	31.750	-200		-200														
15.875 (5/8)	LMB 101824 *	4	79.6	LMB 101824 AJ*	4	77.6	LMB 101824 OP*	3	64		5/8			1 1/8		1 1/2			28.04	0	1.422	26.899	1.5	9.5	80		424	488	766	1 080			
	LMB 101824 N*	4	76	LMB 101824 N AJ*	4	74	LMB 101824 N OP*	3	57		15.875			28.575		38.100																	
19.050 (3/4)	LMB 122026 *	5	99.5	LMB 122026 AJ*	5	97.5	LMB 122026 OP*	4	86		3/4			1 1/4		1 5/8			29.61	0	1.422	29.870	1.5	11.1	60		554	659	1 000	1 470			
	LMB 122026 N*	5	95	LMB 122026 N AJ*	5	93	LMB 122026 N OP*	4	76		19.050	0	0	31.750	0	41.275																	
25.400 (1)	LMB 162536 *	6	207	LMB 162536 AJ*	6	205	LMB 162536 OP*	5	190		1	-7	-10	1 9/16	-16	2 1/4			44.57	0	1.727	37.306	1.5	14.3	50		923	978	1 780	2 280			
	LMB 162536 N*	6	200	LMB 162536 N AJ*	6	198	LMB 162536 N OP*	5	170		25.400			39.688		57.150																	
31.750 (1 1/4)	LMB 203242 *	6	434	LMB 203242 AJ*	6	424	LMB 203242 OP*	5	390		1 1/4			2		2 5/8			50.92	0	1.727	47.904	2.5	15.9	50		1 370	1 450	2 510	3 210			
	LMB 203242 N*	6	421	LMB 203242 N AJ*	6	411	LMB 203242 N OP*	5	375		31.750			50.800	0	66.675																	
38.100 (1 1/2)	LMB 243848 *	6	662	LMB 243848 AJ*	6	652	LMB 243848 OP*	5	610		1 1/2	0	0	2 3/8	-19	3			61.26	0	2.184	56.870	3	19.1	50		2 010	2 130	3 610	4 620			
	LMB 243848 N*	6	646	LMB 243848 N AJ*	6	636	LMB 243848 N OP*	5	595		38.100	-8	-12	60.325		76.200	-300		-300														
50.800 (2)	LMB 324864 *	6	1 185	LMB 324864 AJ*	6	1 165	LMB 324864 OP*	5	1 120		2			3		4			81.07	0	2.616	72.085	3	25.4	50		3 960	4 190	7 140	9 130			
	LMB 324864 N*	6	1 140	LMB 324864 N AJ*	6	1 120	LMB 324864 N OP*	5	980		50.800			76.200		101.600																	
63.500 (2 1/2)	LMB 406080 *	6	2 600	LMB 406080 AJ*	6	2 560	LMB 406080 OP*	5	2 230		2 1/2	0	0	3 3/4	0	5			100.99	0	3.048	90.220	3	31.8	50		5 190	5 490	9 090	11 600			
	LMB 406080 N*	6	2 560	LMB 406080 N AJ*	6	2 560	LMB 406080 N OP*	5	2 230		63.500	0	0	95.250	-22	127.000																	
76.200 (3)	LMB 487296 *	6	4 380	LMB 487296 AJ*	6	4 350	LMB 487296 OP*	5	3 750		3	-9	-15	4 1/2		6			120.04	0	3.048	109.474	3	38.1	50		8 620	9 120	14 500	18 500			
	LMB 487296 N*	6	4 380	LMB 487296 N AJ*	6	4 350	LMB 487296 N OP*	5	3 750		76.200			114.300		152.400	0		0														
101.600 (4)	LMB 6496128 *	6	10 200	LMB 6496128 AJ*	6	10 150	LMB 6496128 OP*	5	8 740		4	0	0	6	0	8			-400	0	158.95	-400	3.53	145.923	3	50.8	50	20	30	17 000	18 000	28 600	36 500
	LMB 6496128 N*	6	10 200	LMB 6496128 N AJ*	6	10 150	LMB 6496128 N OP*	5	8 740		101.600	-10	-20	152.400	-25	203.200	-400																

Notes (1) The width of hub for fixing with circlip should be the value obtained by subtracting a circlip width value times two from the C₁ dimension.


Remarks 1. "P" and "H" in Dim. F_w tolerance and Eccentricity represent precision and high, respectively.

2. High carbon steel-made retainer (shaft diameter 6.350 mm and 9.525 mm), and standard type and adjustable clearance type (shaft diameter 12.700 mm to 50.800 mm) end plates are fixed with stop ring for holes.

3. The identification numbers with * are our semi-standard items.

LMB • LM • LMS

	Standard type					Adjustable clearance type					Open type				
Shape	LM... F LM... N F					LM... F AJ LM... N F AJ					LM... F OP LM... N F OP				
Shaft diameter	6	8	10	12	13	6	8	10	12	13	—	—	10	12	13
	16	20	25	30	35	16	20	25	30	35	16	20	25	30	35
	40	50	60			40	50	60			40	50	60		

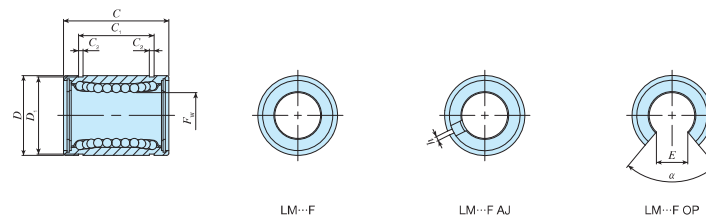

Shaft diameter mm	Identification number										Nominal dimensions and tolerances mm															Eccentricity		Basic dynamic load rating		Basic static load rating		
	Standard type	Ball raceway	Mass (Ref.) g	Adjustable clearance type	Ball raceway	Mass (Ref.) g	Open type	Ball raceway	Mass (Ref.) g		F_w	Dim. F_w tolerance μm		D	Dim. D tolerance μm	C	Dim. C tolerance μm	C_1 (°)	Dim. C_1 tolerance μm	C_2	D_1	h	E	a	Maximum μm	Degree	P	H	Load direction A N	Load direction B N	Load direction A N	Load direction B N
												P	H																			
6	LM 61219 F	4	8		—	—		—	—	6			12		19		13.5		1.1	11.5	— 1	—	—						80.7	92.7	167	237
8	LM 61219 N F	4	7.6	LM 61219 N F AJ*	4	7.5																										
	LM 81517 F	4	13		—	—		—	—	8			15	0 -11	17		11.5		1.1	14.3	— 1	—	—						87.4	100	160	226
	LM 81517 N F	4	10.4	LM 81517 N F AJ*	4	10													1.1	14.3	— 1	—	—					121	139	255	361	
	LM 81524 F	4	18		—	—		—	—	8			15		24		17.5				— 1	—	—									
10	LM 101929 F	4	30		—	—		—	—	10	0 -6	0 -9	19		29		22	0	1.3	18	— 1	—	—	—	8	12			179	206	354	501
	LM 101929 N F	4	27.5	LM 101929 N F AJ*	4	26.5	LM 101929 N F OP*	3	18												— 1	6.8	80									
12	LM 122130 F	4	29	LM 122130 F AJ*	4	28	LM 122130 F OP*	3	19	12			21		30		23	-200	1.3	20	1.5	8	80					259	298	503	711	
	LM 122130 N F	4	31.5	LM 122130 N F AJ*	4	30.5	LM 122130 N F OP*	3	22					0 -13																		
13	LM 132332 F	4	43	LM 132332 F AJ*	4	42	LM 132332 F OP*	3	31	13			23		32		23		1.3	22	1.5	9	80					266	306	506	716	
	LM 132332 N F	4	42.5	LM 132332 N F AJ*	4	41.5	LM 132332 N F OP*	3	31																							
16	LM 162837 F	4	70	LM 162837 F AJ*	4	69.5	LM 162837 F OP*	3	58	16			28		37		26.5		1.6	27	1.5	11	80					426	489	766	1 080	
	LM 162837 N F	4	69	LM 162837 N F AJ*	4	68	LM 162837 N F OP*	3	52																							
20	LM 203242 F	5	92	LM 203242 F AJ*	5	91	LM 203242 F OP*	4	79	20			32		42		30.5		1.6	30.5	1.5	11	60					562	668	1 010	1 470	
	LM 203242 N F	5	87	LM 203242 N F AJ*	5	85	LM 203242 N F OP*	4	69																							
25	LM 254059 F	6	226	LM 254059 F AJ*	6	222	LM 254059 F OP*	5	203	25	0 -7	0 -10	40	0 -16	59		41		1.85	38	2	12	50	10	15			920	974	1 780	2 280	
	LM 254059 N F	6	220	LM 254059 N F AJ*	6	216	LM 254059 N F OP*	5	188																							
30	LM 304564 F	6	253	LM 304564 F AJ*	6	250	LM 304564 F OP*	5	228	30			45		64		44.5		1.85	43	2.5	15	50					1 350	1 430	2 500	3 200	
	LM 304564 N F	6	250	LM 304564 N F AJ*	6	245	LM 304564 N F OP*	5	210																							
35	LM 355270 F	6	387	LM 355270 F AJ*	6	380	LM 355270 F OP*	5	355	35			52		70		49.5	0	2.1	49	2.5	17	50					1 610	1 710	3 080	3 940	
	LM 355270 N F	6	380	LM 355270 N F AJ*	6	375	LM 355270 N F OP*	5	335																							
40	LM 406080 F	6	596	LM 406080 F AJ*	6	585	LM 406080 F OP*	5	546	40	0 -8	0 -12	60	0 -19	80	-300	60.5	-300	2.1	57	3	20	50	12	20			2 030	2 150	3 620	4 640	
	LM 406080 N F	6	585	LM 406080 N F AJ*	6	579	LM 406080 N F OP*	5	500																							
50	LM 5080100 F	6	1 615	LM 5080100 F AJ*	6	1 595	LM 5080100 F OP*	5	1 420	50			80		100		74		2.6	76.5	3	25	50					3 940	4 180	7 130	9 120	
	LM 5080100 N F	6	1 580	LM 5080100 N F AJ*	6	1 560	LM 5080100 N F OP*	5	1 340																							
60	LM 6090110 F	6	1 817	LM 6090110 F AJ*	6	1 788	LM 6090110 F OP*	5	1 650	60	0 -9	0 -15	90	0 -22	110		85		3.15	86.5	3	30	50	17	25			4 760	5 040	8 150	10 400	
	LM 6090110 N F	6	1 787	LM 6090110 N F AJ*	6	1 757	LM 6090110 N F OP*	5	1 610																							


Note (1) The width of hub for fixing with circlip should be the value obtained by subtracting a circlip width value times two from the C_1 dimension.

Remarks 1. "P" and "H" in Dim. F_w tolerance and Eccentricity represent precision and high, respectively.

2. Standard type and adjustable clearance type end plates are fixed with stop ring for holes.

3. The identification numbers with * are our semi-standard items.

	Standard type					Adjustable clearance type					Open type				
Shape	LM... F UU LM... N F UU					LM... F UU AJ LM... N F UU AJ					LM... F UU OP LM... N F UU OP				
															
Shaft diameter	6	8	10	12	13	6	8	10	12	13	—	—	10	12	13
	16	20	25	30	35	16	20	25	30	35	16	20	25	30	35
	40	50	60			40	50	60			40	50	60		

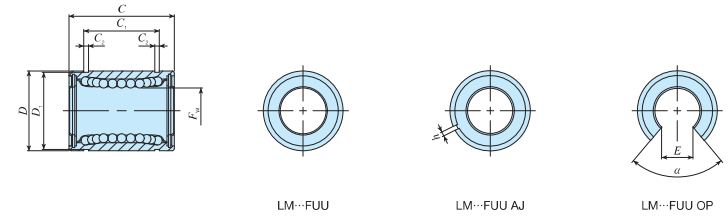

Shaft diameter mm	Identification number											Nominal dimensions and tolerances mm													Eccentricity		Basic dynamic load rating		Basic static load rating				
	Standard type		Ball raceway	Mass (Ref.) g	Adjustable clearance type		Ball raceway	Mass (Ref.) g	Open type			Ball raceway	Mass (Ref.) g	F_w	Dim. Fw tolerance μm		D	Dim. D tolerance μm	C	Dim. C tolerance μm	C_1 (°)	Dim. C ₁ tolerance μm	C_2	D_1	h	E	α	Maximum μm		C		C_0	
															P	H												P	H	Load direction A N	Load direction B N	Load direction A N	Load direction B N
6	LM 61219 F UU	4	8	LM 61219 N F UU AJ*	4	7.5						6			12		19		13.5		1.1	11.5	1	—	—			80.7	92.7	167	237		
8	LM 81517 F UU	4	13	LM 81517 N F UU AJ*	4	10						8			15	0 -11	17		11.5		1.1	14.3	1	—	—			87.4	100	160	226		
	LM 81524 F UU	4	18	LM 81524 N F UU AJ*	4	14.7						8			15		24		17.5		1.1	14.3	1	—	—			121	139	255	361		
	LM 81524 N F UU	4	15																														
10	LM 101929 F UU	4	30	LM 101929 N F UU AJ*	4	26.5	LM 101929 N F UU OP*	3	18			10	0 -6	0 -9	19		29	0 -200	22	0 -200	1.3	18	1	—	—	—	8	12	179	206	354	501	
12	LM 122130 F UU	4	29	LM 122130 F UU AJ*	4	28	LM 122130 F UU OP*	3	19			12			21	0 -13	30		23		1.3	20	1.5	8	80			259	298	503	711		
	LM 122130 N F UU	4	31.5	LM 122130 N F UU AJ*	4	30.5	LM 122130 N F UU OP*	3	22						21		30		23		1.3	20	1.5	8	80			259	298	503	711		
13	LM 132332 F UU	4	43	LM 132332 F UU AJ*	4	42	LM 132332 F UU OP*	3	31			13			23		32		23		1.3	22	1.5	9	80			266	306	506	716		
	LM 132332 N F UU	4	42.5	LM 132332 N F UU AJ*	4	41.5	LM 132332 N F UU OP*	3	31						23		32		23		1.3	22	1.5	9	80			266	306	506	716		
16	LM 162837 F UU	4	70	LM 162837 F UU AJ*	4	69.5	LM 162837 F UU OP*	3	58			16			28		37		26.5		1.6	27	1.5	11	80			426	489	766	1 080		
	LM 162837 N F UU	4	69	LM 162837 N F UU AJ*	4	68	LM 162837 N F UU OP*	3	52						28		37		26.5		1.6	27	1.5	11	80			426	489	766	1 080		
20	LM 203242 F UU	5	92	LM 203242 F UU AJ*	5	91	LM 203242 F UU OP*	4	79			20			32		42		30.5		1.6	30.5	1.5	11	60			562	668	1 010	1 470		
	LM 203242 N F UU	5	87	LM 203242 N F UU AJ*	5	85	LM 203242 N F UU OP*	4	69						32		42		30.5		1.6	30.5	1.5	11	60			562	668	1 010	1 470		
25	LM 254059 F UU	6	226	LM 254059 F UU AJ*	6	222	LM 254059 F UU OP*	5	203			25	0 -7	0 -10	40	0 -16	59		41		1.85	38	2	12	50	10	15	920	974	1 780	2 280		
	LM 254059 N F UU	6	220	LM 254059 N F UU AJ*	6	216	LM 254059 N F UU OP*	5	188						40		59		41		1.85	38	2	12	50			920	974	1 780	2 280		
30	LM 304564 F UU	6	253	LM 304564 F UU AJ*	6	250	LM 304564 F UU OP*	5	228			30			45		64		44.5		1.85	43	2.5	15	50			1 350	1 430	2 500	3 200		
	LM 304564 N F UU	6	250	LM 304564 N F UU AJ*	6	245	LM 304564 N F UU OP*	5	210						45		64		44.5		1.85	43	2.5	15	50			1 350	1 430	2 500	3 200		
35	LM 355270 F UU	6	387	LM 355270 F UU AJ*	6	380	LM 355270 F UU OP*	5	355			35			52		70	0 -300	49.5	0 -300	2.1	49	2.5	17	50			1 610	1 710	3 080	3 940		
	LM 355270 N F UU	6	380	LM 355270 N F UU AJ*	6	375	LM 355270 N F UU OP*	5	335						52		70		49.5		2.1	49	2.5	17	50			1 610	1 710	3 080	3 940		
40	LM 406080 F UU	6	596	LM 406080 F UU AJ*	6	585	LM 406080 F UU OP*	5	546			40	0 -8	0 -12	60	0 -19	80		60.5		2.1	57	3	20	50	12	20	2 030	2 150	3 620	4 640		
	LM 406080 N F UU	6	585	LM 406080 N F UU AJ*	6	579	LM 406080 N F UU OP*	5	500						60		80		60.5		2.1	57	3	20	50			2 030	2 150	3 620	4 640		
50	LM 5080100 F UU	6	1 615	LM 5080100 F UU AJ*	6	1 595	LM 5080100 F UU OP*	5	1 420			50			80		100		74		2.6	76.5	3	25	50			3 940	4 180	7 130	9 120		
	LM 5080100 N F UU	6	1 580	LM 5080100 N F UU AJ*	6	1 560	LM 5080100 N F UU OP*	5	1 340						80		100		74		2.6	76.5	3	25	50			3 940	4 180	7 130	9 120		
60	LM 6090110 F UU	6	1 817	LM 6090110 F UU AJ*	6	1 788	LM 6090110 F UU OP*	5	1 650			60	0 -9	0 -15	90	0 -22	110		85		3.15	86.5	3	30	50	17	25	4 760	5 040	8 150	10 400		
	LM 6090110 N F UU	6	1 787	LM 6090110 N F UU AJ*	6	1 757	LM 6090110 N F UU OP*	5	1 610						90		110		85		3.15	86.5	3	30	50			4 760	5 040	8 150	10 400		


Note (1) The width of hub for fixing with circlip should be the value obtained by subtracting a circlip width value times two from the C₁ dimension.

Remarks 1. "P" and "H" in Dim. F_w tolerance and Eccentricity represent precision and high, respectively.

2. Standard type and adjustable clearance type end plates are fixed with stop ring for holes.

3. The identification numbers with * are our semi-standard items.

	Standard type					Adjustable clearance type					Open type				
Shape	LME... F LME... N F					LME... F AJ LME... N F AJ					LME... F OP LME... N F OP				
															
Shaft diameter	5	8	12	16	20	5	8	12	16	20	—	—	12	16	20
	25	30	40	50	60	25	30	40	50	60	25	30	40	50	60

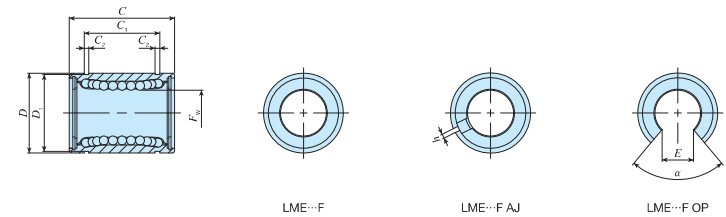


Shaft diameter mm	Identification number									Nominal dimensions and tolerances mm															Eccentricity Maximum μm	Basic dynamic load rating		Basic static load rating			
	Standard type		Ball raceway	Mass (Ref.) g	Adjustable clearance type		Ball raceway	Mass (Ref.) g	Open type	Ball raceway	Mass (Ref.) g	F _w	Dim. F _w tolerance μm	D	Dim. D tolerance μm	C	Dim. C tolerance μm	C ₁ ⁽¹⁾	Dim. C ₁ tolerance μm	C ₂	D ₁	h	E	α		C	Load direction A N	Load direction B N	C ₀	Load direction A N	Load direction B N
5	LME 51222 N F*	4	11	LME 51222 N F AJ*	4	9.5	—	—	—	—	—	5	+ 8 0	12	0	22	0	14.5	0	1.1	11.5	1	—	—	12	90.8	104	219	310		
8	LME 81625 N F*	4	20	—	—	—	—	—	—	—	8	16		− 8	25	0		16.5		−200	−200	1.1	15.2	—		—	—	121	139	255	361
	LME 81625 N F*	4	20	LME 81625 N F AJ*	4	19.5	—	—	—	—	—	—		—	—			—				—	—	—		—	—	—	—	—	—
12	LME 122232 N F*	4	41.5	LME 122232 N F AJ*	4	39	LME 122232 N F OP*	3	30	12	+ 9 − 1	22	0	32	−200	22.9	−200	1.3	21	1.5	7.5	78	15	259	298	503	711				
	LME 122232 F AJ*	4	40	LME 122232 F OP*	3	30	0	24.9	1.3	24.9		1.5	10	78		283		325	514	726											
16	LME 162636 N F*	4	56.5	LME 162636 N F AJ*	4	54	LME 162636 F OP*	3	48	16		26	− 9	36		0		31.5	0	1.6	30.3	2		10	60	17	562	668	1 010	1 470	
	LME 162636 F AJ*	4	55	LME 162636 F AJ*	4	54	LME 162636 N F OP*	3	46	20	32	45	60	283	325		514	726													
20	LME 203245 N F*	5	97	LME 203245 N F AJ*	5	90	LME 203245 F OP*	4	75	20	32	45	60	0	31.5		0	1.6		30.3	2	10	60	15	562		668	1 010	1 470		
	LME 203245 F AJ*	5	91	LME 203245 F AJ*	5	90	LME 203245 N F OP*	4	75	25	40	58	60		920	974		1 780	2 280												
25	LME 254058 N F*	6	222	LME 254058 N F AJ*	6	212	LME 254058 F OP*	5	181	25	40	−11	68		0	52.1		0	1.85	37.5	2	12.5	60		17	920	974	1 780	2 280		
	LME 254058 F AJ*	6	215	LME 254058 F AJ*	6	212	LME 254058 N F OP*	5	181	30	47	68	50	1 350		1 430	2 500		3 200												
30	LME 304768 N F*	6	338	LME 304768 N F AJ*	6	320	LME 304768 F OP*	5	309	30	47	68	50	0		52.1	0		1.85	44.5	2	12.5	50	17		1 350	1 430	2 500	3 200		
	LME 304768 F AJ*	6	325	LME 304768 F AJ*	6	320	LME 304768 N F OP*	5	272	40	62	80	50		2 030	2 150		3 620	4 640												
40	LME 406280 N F*	6	712	LME 406280 N F AJ*	6	694	LME 406280 F OP*	5	665	40	62	80	50		0	60.6		−300	2.15	59	3	16.8	50		17	2 030	2 150	3 620	4 640		
	LME 406280 F AJ*	6	705	LME 406280 F AJ*	6	694	LME 406280 N F OP*	5	600	50	75	100	50	3 940		4 180	7 130		9 120												
50	LME 5075100 N F*	6	1 147	LME 5075100 N F AJ*	6	1 110	LME 5075100 F OP*	5	1 080	50	75	100	50	0		77.6	−300		2.65	72	3	21	50	17		3 940	4 180	7 130	9 120		
	LME 5075100 F AJ*	6	1 130	LME 5075100 F AJ*	6	1 110	LME 5075100 N F OP*	5	970	60	90	125	60		4 760	5 040		8 150	10 400												
60	LME 6090125 N F*	6	2 051	LME 6090125 N F AJ*	6	2 001	LME 6090125 F OP*	5	1 900	60	90	125	60		0	101.7		−400	3.15	86.5	3	27.2	54		20	4 760	5 040	8 150	10 400		
	LME 6090125 F AJ*	6	2 030	LME 6090125 F AJ*	6	2 000	LME 6090125 N F OP*	5	1 580	—	—	—	—	—		—	—		—	—	—	—	—	—		—	—	—			

Note (1) The width of hub for fixing with circlip should be the value obtained by subtracting a circlip width value times two from the C₁ dimension.

Remarks 1. Stainless steel-made retainer (shaft diameter 8 mm), and standard type and adjustable clearance type (shaft diameter 12 mm to 60 mm) end plates are fixed with stop ring for holes.

2. The identification numbers with * are our semi-standard items.

	Standard type					Adjustable clearance type					Open type				
Shape	LME... F UU LME... N F UU					LME... FUU AJ LME... N FUU AJ					LME... F UU OP LME... N F UU OP				
															
Shaft diameter	5	8	12	16	20	5	8	12	16	20	—	—	12	16	20
	25	30	40	50	60	25	30	40	50	60	25	30	40	50	60

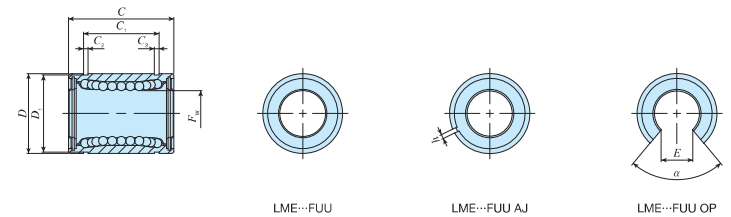

Shaft diameter mm	Identification number										Nominal dimensions and tolerances mm															Eccentricity Maximum μm	Basic dynamic load rating		Basic static load rating	
	Standard type		Ball raceway	Mass (Ref.) g	Adjustable clearance type		Ball raceway	Mass (Ref.) g	Open type		Ball raceway	Mass (Ref.) g	F_w	Dim. F_w tolerance μm	D	Dim. D tolerance μm	C	Dim. C tolerance μm	$C_1^{(1)}$	Dim. C_1 tolerance μm	C_2	D_1	h	E	α Degree		Load direction A N	Load direction B N	Load direction A N	Load direction B N
5	LME 51222 N F UU*	4	11	LME 51222 N F UU AJ*	4	9.5	—	—	—	—	—	5	+ 8 0	12	0 — 8	22	0 — 200	14.5	0 — 200	1.1	11.5	1	—	—	12	90.8	104	219	310	
8	LME 81625 F UU*	4	20	—	—	—	—	—	—	—	8	16		— 8	25	0 — 9		16.5		0 — 200	1.1	15.2	— 1	—		—	121	139	255	361
	LME 81625 N F UU*	4	20	LME 81625 N F UU AJ*	4	19.5	—	—	—	—	—	16	— 9	36	0 — 200		24.9	0 — 200	1.3		21	1.5	7.5	78	259	298	503	711		
12	LME 122232 F UU*	4	41.5	LME 122232 F UU AJ*	4	40.5	LME 122232 F UU OP*	3	32	3	30	12	+ 9 — 1	22		0 — 9	32		0 — 200	22.9	0 — 200	1.3	21	1.5	7.5	78	12	259	298	503
	LME 122232 N F UU*	4	40	LME 122232 N F UU AJ*	4	39	LME 122232 N F UU OP*	3	30	3	30	16		26	36	0 — 200	24.9	0 — 200		1.3		24.9	1.5	10	78	283		325	514	726
16	LME 162636 F UU*	4	56.5	LME 162636 F UU AJ*	4	55.5	LME 162636 F UU OP*	3	48	3	46	16	+ 9 — 1	26	0 — 9		36		0 — 200	24.9	0 — 200	1.3	24.9	1.5	10	78	12	283	325	514
	LME 162636 N F UU*	4	55	LME 162636 N F UU AJ*	4	54	LME 162636 N F UU OP*	3	46	3	46	20		32	45	0 — 11	31.5	0 — 200		1.6		30.3	2	10	60	562		668	1 010	1 470
20	LME 203245 F UU*	5	97	LME 203245 F UU AJ*	5	96	LME 203245 F UU OP*	4	84	4	75	20	+ 11 — 1	32	0 — 11		58		0 — 300	44.1	0 — 300	1.85	37.5	2	12.5	60	15	920	974	1 780
	LME 203245 N F UU*	5	91	LME 203245 N F UU AJ*	5	90	LME 203245 N F UU OP*	4	75	4	75	25		40	58	0 — 11	52.1	0 — 300		1.85		44.5	2	12.5	50	1 350		1 430	2 500	3 200
25	LME 254058 F UU*	6	222	LME 254058 F UU AJ*	6	219	LME 254058 F UU OP*	5	195	5	181	25	+ 11 — 1	40	0 — 11		68		0 — 300	44.1	0 — 300	1.85	44.5	2	12.5	50	15	920	974	1 780
	LME 254058 N F UU* ⁽²⁾	6	215	LME 254058 N F UU AJ* ⁽²⁾	6	212	LME 254058 N F UU OP* ⁽²⁾	5	181	5	181	30		47	68	0 — 300	52.1	0 — 300		1.85		44.5	2	12.5	50	1 350		1 430	2 500	3 200
30	LME 304768 F UU*	6	338	LME 304768 F UU AJ*	6	333	LME 304768 F UU OP*	5	309	5	272	30	+ 13 — 2	47	0 — 13		100		0 — 300	60.6	0 — 300	2.15	59	3	16.8	50	17	2 030	2 150	3 620
	LME 304768 N F UU*	6	325	LME 304768 N F UU AJ*	6	320	LME 304768 N F UU OP*	5	272	5	272	40		62	80	0 — 13	77.6	0 — 300		2.15		59	3	16.8	50	2 030		2 150	3 620	4 640
40	LME 406280 F UU*	6	712	LME 406280 F UU AJ*	6	701	LME 406280 F UU OP*	5	665	5	600	40	+ 13 — 2	62	0 — 13		80		0 — 300	60.6	0 — 300	2.15	59	3	16.8	50	17	2 030	2 150	3 620
	LME 406280 N F UU*	6	705	LME 406280 N F UU AJ*	6	694	LME 406280 N F UU OP*	5	600	5	600	50		75	100	0 — 13	77.6	0 — 300		2.65		72	3	21	50	3 940		4 180	7 130	9 120
50	LME 5075100 F UU*	6	1 147	LME 5075100 F UU AJ*	6	1 127	LME 5075100 F UU OP*	5	1 080	5	970	50	+ 13 — 2	75	— 13		100		0 — 300	77.6	0 — 300	2.65	72	3	21	50	17	3 940	4 180	7 130
	LME 5075100 N F UU*	6	1 130	LME 5075100 N F UU AJ*	6	1 110	LME 5075100 N F UU OP*	5	970	5	970	60		90	0 — 15	125	0 — 400	101.7		0 — 400		3.15	86.5	3	27.2	54		20	4 760	5 040
60	LME 6090125 F UU*	6	2 051	LME 6090125 F UU AJ*	6	2 001	LME 6090125 F UU OP*	5	1 900	5	1 900	60	+ 13 — 2	90	0 — 15	125	0 — 400	101.7	0 — 400	3.15	86.5	3	27.2	54	20	4 760	5 040	8 150	10 400	
	LME 6090125 N F UU*	6	2 050	LME 6090125 N F UU AJ*	6	2 000	LME 6090125 N F UU OP*	5	1 580	5	1 580	60		90	0 — 15	125	0 — 400	101.7	0 — 400	3.15	86.5	3	27.2	54	20	4 760	5 040	8 150	10 400	

Notes ⁽¹⁾ The width of hub for fixing with circlip should be the value obtained by subtracting a circlip width value times two from the C_1 dimension.

⁽²⁾ The seal is slightly off from the external cylinder end.

Remarks 1. Stainless steel-made retainer (shaft diameter 8 mm), and standard type and adjustable clearance type (shaft diameter 12 mm to 60 mm) end plates are fixed with stop ring for holes.

2. The identification numbers with * are our semi-standard items.